



## A Robust, Intelligent Layer 2 Ethernet Switch for Small Workgroups

- 5.6Gbps Non-Blocking Switching Architecture
- iStacking™ Clustering Technology, One IP Management for 24 Devices
- iManage™ Easy Management Tools (GUI, CLI & Text-based Configuration for Scripting)
- 802.1x Port-based Authentication for Central Management
- Port-based and 802.1Q Tagged VLAN (4K PVID)
- MAC Filtering, MAC Freeze, Intrusion Lock and Specific MAC Forwarding



8-port Managed Layer 2 Fast Ethernet Switch

ES-2108  
SERIES

### Benefits

#### Powerful Compact Design for Small Workgroup Environment

The ES-2108 Managed Layer 2 Fast Ethernet Switch Series is designed for small workgroup environment. Thanks to its compact 8-port design and selections of uplink options (1000Base-T, SFP, 100FX), the ES-2108 Series offers functionality and connectivity that best fit small-workgroup needs. In addition, the wall-mountable design adds flexibility of deployment.

The ES-2108 Series comes in four models: ES-2108, ES-2108-G, ES-2108-LC and ES-2108PWR. All switches come with a non-blocking 5.6 Gbps switching architecture for wire-speed transmission. The ES-2108 has 8 10/100Base-T ports without the uplink interface. The ES-2108-G comes with one dual personality Gigabit uplink port. The ES-2108-LC comes with independent uplink interface of one 100FX port and one SFP slot to ease deployment of fiber connectivity with future-proof hardware. In addition to having all the features in ES-2108-G, ES-2108PWR includes the PoE (Power over Ethernet) to supply power to devices connected to the 8 10/100Base-T ports simultaneously.

#### Excellent Network Management Capability


The ZyXEL ES-2108 Series includes rich management tools to streamline your management effort. With ZyXEL's exclusive iStacking™ technology, you can manage up to 24 ZyXEL switches through one IP address. In addition, through iManage™ that includes Web-GUI, CLI (Command Line Interface) and text-based configuration, network managers can select the one management interface they are most comfortable with and get the job done efficiently. Moreover, you can protect your management session with SSHv1/v2 authentication and SSL encryption features. With its comprehensive features, ZyXEL's ES-2108 Series is your first choice for cost-effective networking.

#### Security on the Network Edge

Support of IEEE 802.1x authentication allows centralized user management and added security protection. The ES-2108 Series comes with complete VLAN functions (IEEE 802.1Q VLAN tagging and port-based VLAN) to secure your network. With 4K PVID, you have complete freedom in VLAN management. The ES-2108 Series also includes device-aware security features (MAC address, like MAC filtering, MAC freezing and MAC forwarding) to effectively prevent access of unidentified devices. All these features offer extra protection on the network edge.



## Application Diagram

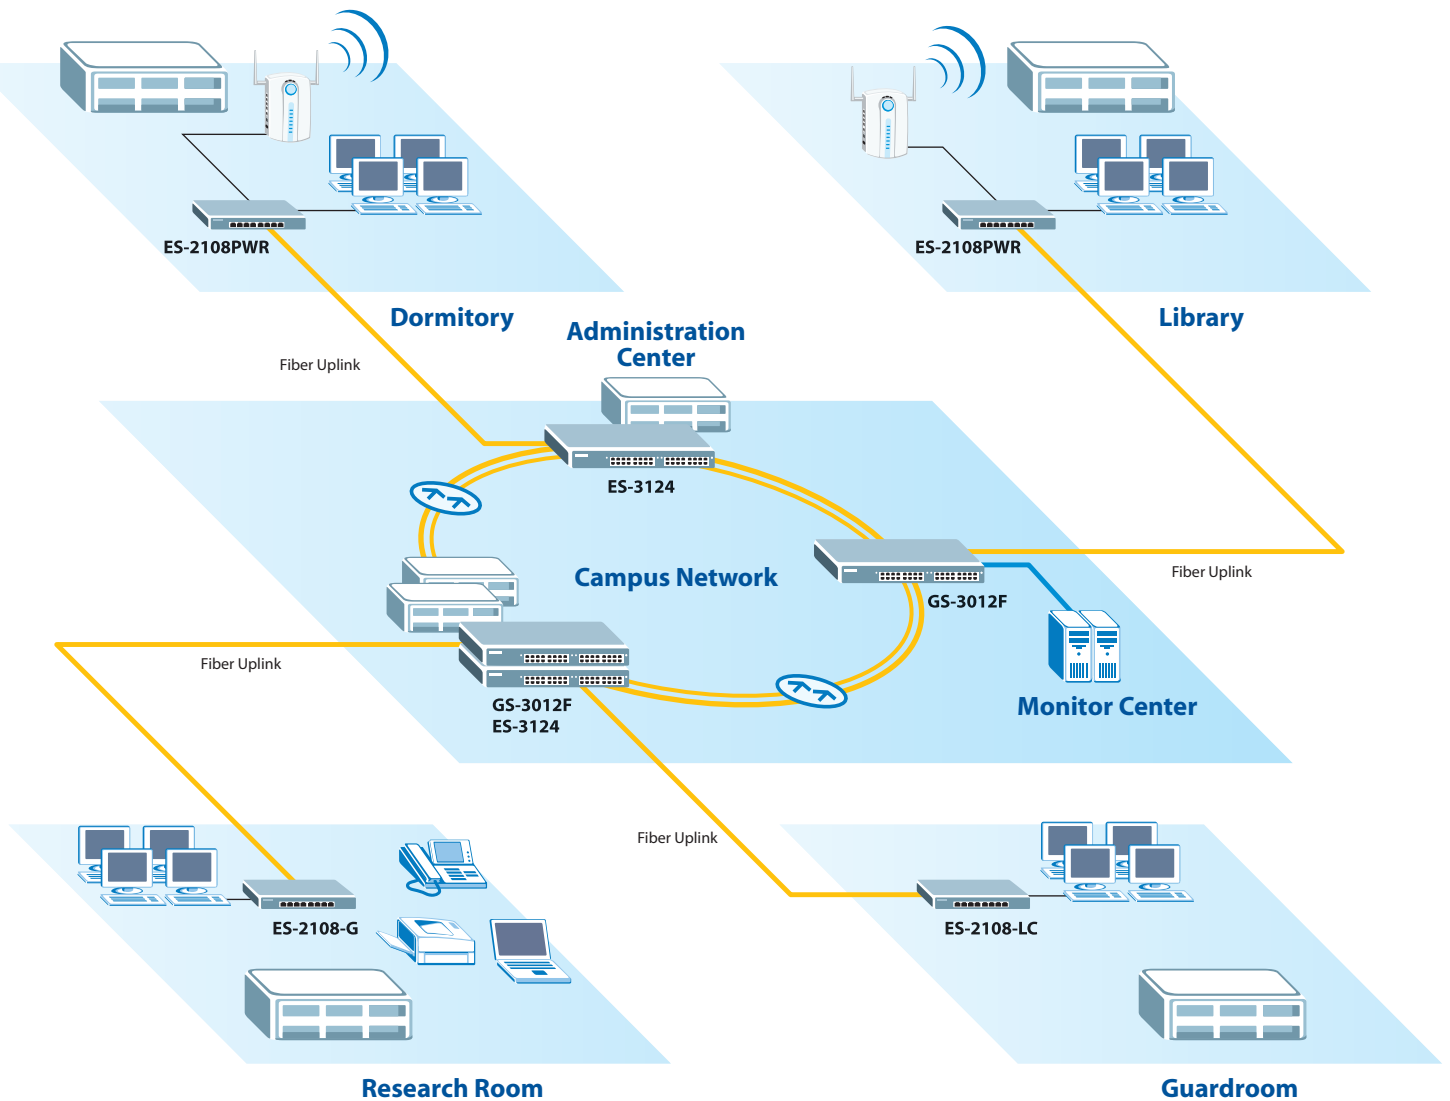

## Operational Information

### Transceiver (Optional)

Model Name	Optical Receiver Sensitivity	Wavelength	Connector	Transmission Distance vs. Fiber Cable Specification			Operational Ranges	
				62.5um Multi-Mode Fiber	50um Multi-Mode Fiber	9/10um Single-Mode Fiber	Supply Voltage	Max Current
SFP-SX	-17 dBm	850 nm	LC	220 m	550 m	-	3.15 ~ 3.45 V	300 mA
SFP-LX-10	-20 dBm	1310 nm	LC	550 m	550 m	10 km	3.15 ~ 3.45 V	300 mA
SFP-LHX1310-40	-23 dBm	1310 nm	LC	-	-	40 km	3.15 ~ 3.45 V	300 mA
SFP-ZX-80	-24 dBm	1550 nm	LC	-	-	80 km	3.15 ~ 3.45 V	300 mA

For more product information, visit us on the web [www.ZyXEL.com](http://www.ZyXEL.com)

**Corporate Headquarters**  
**ZyXEL Communications Corp.**  
Tel: +886-3-578-3942  
Fax: +886-3-578-2439  
Email: [sales@zyxel.com.tw](mailto:sales@zyxel.com.tw)  
<http://www.zyxel.com>

**ZyXEL Denmark A/S**  
Tel: +45 39 55 07 00  
Fax: +45 39 55 07 07  
Email: [sales@zyxel.dk](mailto:sales@zyxel.dk)  
<http://www.zyxel.dk>

**ZyXEL France SARL**  
Tel: +33 (0)4 72 52 97 97  
Fax: +33 (0)4 72 52 19 20  
Email: [info@zyxel.fr](mailto:info@zyxel.fr)  
<http://www.zyxel.fr>

**ZyXEL Hungary**  
Tel: +36-1-336-1646  
Fax: +36-1-325-9100  
Email: [info@zyxel.hu](mailto:info@zyxel.hu)  
<http://www.zyxel.hu>

**ZyXEL North America**  
Tel: +1-714-632-0882  
Fax: +1-714-632-0858  
Email: [sales@zyxel.com](mailto:sales@zyxel.com)  
<http://www.us.zyxel.com>

**ZyXEL Poland**  
Tel: +48 (22) 333 8250  
Fax: +48 (22) 333 8251  
Email: [info@pl.zyxel.com](mailto:info@pl.zyxel.com)  
<http://www.pl.zyxel.com>

**ZyXEL Spain**  
Tel: +34 902 195 420  
Fax: +34 913 005 345  
Email: [sales@zyxel.es](mailto:sales@zyxel.es)  
<http://www.zyxel.es>

**ZyXEL UK Ltd.**  
Tel: +44 (0) 1344 303044  
Fax: +44 (0) 1344 303034  
Email: [sales@zyxel.co.uk](mailto:sales@zyxel.co.uk)  
<http://www.zyxel.co.uk>

**ZyXEL Czech s.r.o.**  
Tel: +420 241 091 350  
Fax: +420 241 091 359  
Email: [info@zyxel.cz](mailto:info@zyxel.cz)  
<http://www.zyxel.cz>

**ZyXEL Finland Oy**  
Tel: +358-9-4780 8400  
Fax: +358-9-4780 8448  
Email: [sales@zyxel.fi](mailto:sales@zyxel.fi)  
<http://www.zyxel.fi>

**ZyXEL Germany GmbH.**  
Tel: +49 (0) 2405-6909 0  
Fax: +49 (0) 2405-6909 99  
Email: [sales@zyxel.de](mailto:sales@zyxel.de)  
<http://www.zyxel.de>

**ZyXEL Kazakhstan**  
Tel: +7-327-2-590-699  
Fax: +7-327-2-590-689  
Email: [sales@zyxel.kz](mailto:sales@zyxel.kz)  
<http://www.zyxel.kz>

**ZyXEL Norway A/S**  
Tel: +47 22 80 61 80  
Fax: +47 22 80 61 81  
Email: [sales@zyxel.no](mailto:sales@zyxel.no)  
<http://www.zyxel.no>

**ZyXEL Russia**  
Tel: +7 (095) 542-8920  
Fax: +7 (095) 542-8925  
Email: [info@zyxel.ru](mailto:info@zyxel.ru)  
<http://www.zyxel.ru>

**ZyXEL Sweden A/S**  
Tel: +46 (0) 31 744 77 00  
Fax: +46 (0) 31 744 77 01  
Email: [sales@zyxel.se](mailto:sales@zyxel.se)  
<http://www.zyxel.se>

**ZyXEL Ukraine**  
Tel: +380 44 494 49 31  
Fax: +380 44 494 49 32  
Email: [sales@ua.zyxel.com](mailto:sales@ua.zyxel.com)  
<http://www.ua.zyxel.com>



Copyright © 2006 ZyXEL Communications Corp. All rights reserved. ZyXEL, ZyXEL logo are registered trademarks of ZyXEL Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.